

INSTALLATION INSTRUCTIONS - Model No. KBPS



Magrini Stay-Safe Baby Seat

IMPORTANT NOTES:

To assure proper installation, we suggest that a qualified person or carpenter install this unit. Magrini Ltd. will not be responsible if the seat is not installed properly.

All recommended fixings are available free of charge from Magrini - do not use less substantial fittings.

We do not recommend fixing onto toilet or changing room cubicle doors.

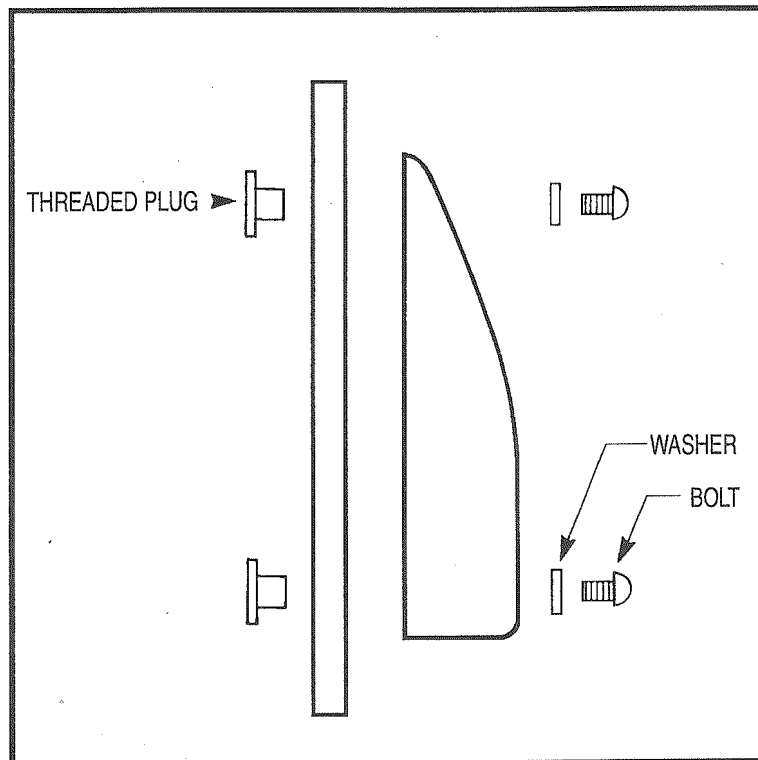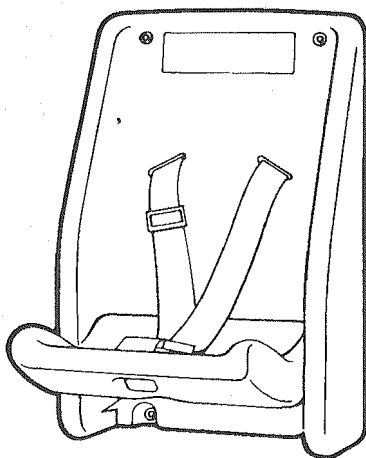

Use the Stay-Safe Baby Seat as the template for locating the four mounting holes on the wall. Recommended height from the floor to the bottom of the unit is 20" (50cm).

For fixing into blockwork or brickwork:

Use No.14 screws (6.5mm dia. x 75mm long) together with large size 10mm block fixing anchor, (both supplied). DO NOT use shorter screws than 75mm.

Use the flat washer (supplied) on all four fasteners. This is important to prevent the unit pulling over the screw heads.

For fixing onto cubicle walls:

Take door swing and clearance into consideration to locate the proper placement of the four mounting holes on the fixed partition. Drill four 9.5mm holes through the wall.

Insert the four threaded plugs with hex head holes (supplied) from the outside of the wall. Mount the Stay-Safe Baby Seat with four 6.5mm bolts and washers (supplied).

Use the flat washer (supplied) on all four fasteners. This is important to prevent the unit pulling over the screw heads.



You can order spare parts or stickers direct from MAGRINI Ltd.

TEL: 01543 375311 or FAX: 01543 361172